


YELLOW CAP

SCHULZE

USER`s Manual

TECHNICAL DATA

Dimensions	25 x 50 x 50 cm
Weight	.25 kg
Voltage	230VAC/ 300W
Fuse	6A
Max. temperature	.220 °C
Temperature range	.0 - 220°C
Pressure	.0 -300 kg
Time	.0 - 9:59 Min.
Max. variation of temperature	-.1 / +3 °C

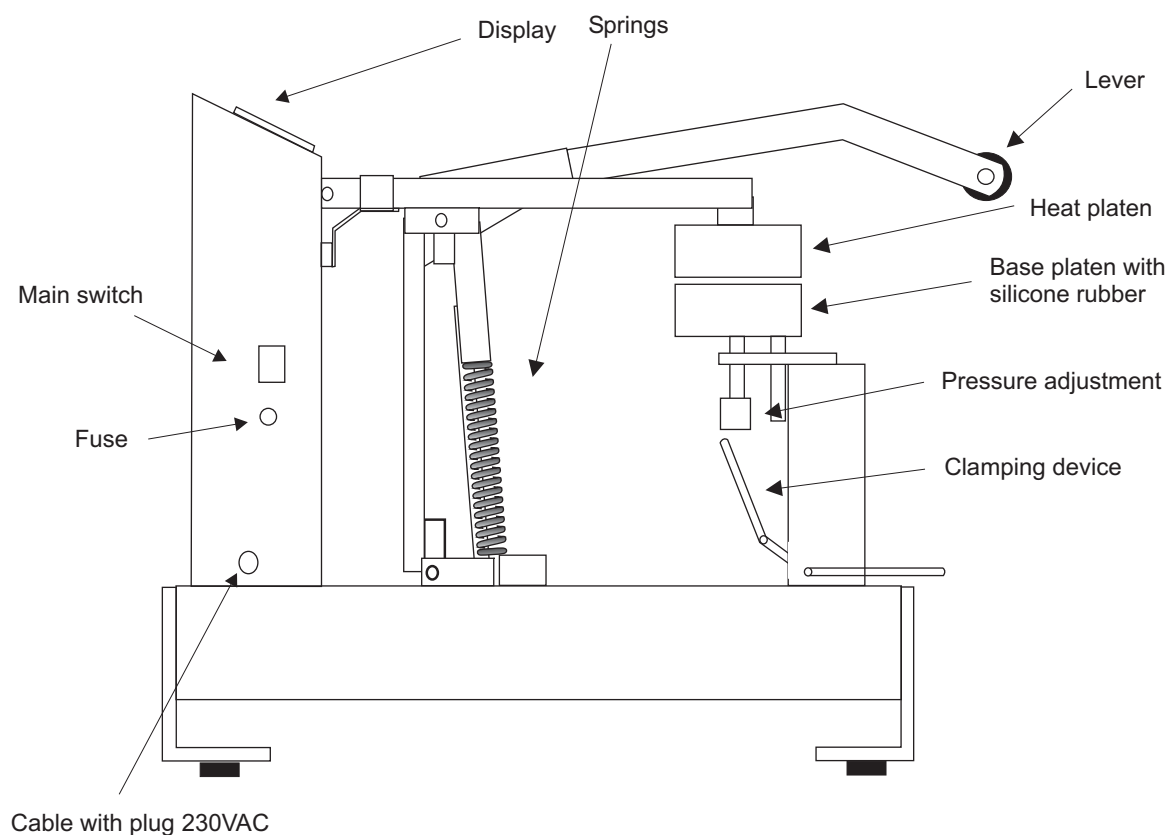

YELLOW CAP

SCHULZE

SWITCH ON

Before you switch on the device, please check if your socket is in proper condition and if the grounding wire is connected properly.

The green toggle switch activates the press. The display shows the current temperature of the heat platen and the press will heat immediately until the indicated temperature is reached (LED 1 is shining).

PRESSURE ADJUSTMENT

You can change the pressure with the regulation screw upon the heat platen.

Make sure the press is open, when regulating the pressure.

Since you cannot read off the pressure you will have to regulate manually in the first place.

Afterwards you do a hardproof test and if necessary change the pressure accordingly.

ATTENTION!

After each change you should close the press once to check the new pressure setting.
Damages due to excess pressure settings are excluded from the guarantee.

MAINTENANCE

All maintenance works should be done when the device is switched off.
You have to pull the plug out of the socket beforehand.

CLEANING

The device should be cleaned with a soft cloth. Use domestic dish washing liquid or window cleaning liquid.
Scrubbing sponges, solvents or petrol are not recommended.

REPLACE SILICONE PAD

The device has to be cold.


Remove old silicone pad completely from base platen.

Use a pallette knife to equally spread out temperature-resistant silicone. Then apply the new silicone pad.

Close the press (cold) with light pressure and let dry for 24h.

This press may only be operated by trained staff after reading the USER's MANUAL.

USER's MANUAL

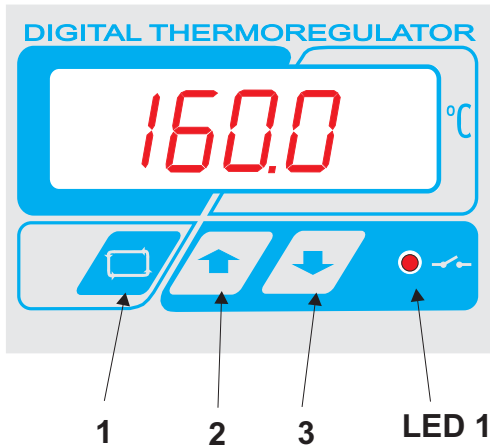


PROGRAMMING

1. Hold **button 1** for 5 seconds until LED 1 is blinking.
2. LED 1 is blinking and the display shows the preset **temperature**.
The programming mode has been switched on.
3. Use buttons -2 or +3 to set new temperature.
4. Press button 1.
The display shows the preset time.
Change the time setting with buttons -2 or +3.
5. Press button 1 to switch off programming mode.

CHECK TEMPERATURE AND TIME

TIME Press button 2, the preset time setting is shown on the display.
Max. time setting is 9 minutes 59 seconds.


TEMPERATURE Press button 3, the preset temperature is shown on the display.

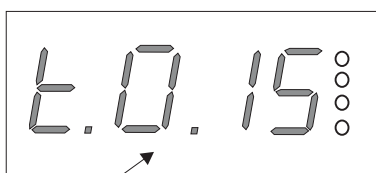

Minutes

Example:

The time setting is 15 seconds.

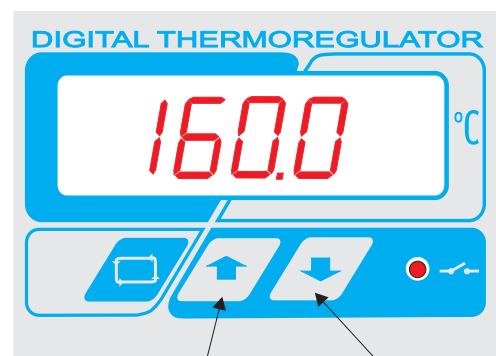

TEMPERATURE

TIME


Example: Settings for the press

This press is used to apply transfers and transfer foils on textiles. Please get in touch with the manufacturer of the textiles, in order to achieve good results. Some settings:

Foil Flex - 150° - 160° C time 12 sec.
Foil Flex S - 155° - 160° C time 12 sec.
Foil Flock - 150° - 160° C time 15 sec.
Foil Velcut- 150° - 160° C time 15 sec.

All information without engagement. Please arrange own tests before manufacturing.


230VAC

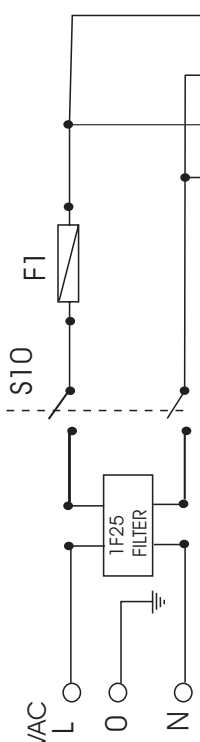

S10 Hauptschalter/ Włacznik główny / Main switch
 S1 fime start..... (czarny / schwarz / black)
 Temperatur(e)sensor (-).....(niebieski / blau / blue)
 Temperatur(e)sensor (+).....(czerwony / rot / red)
 F1 bezpiecznik / Sicherung / fuse 12A
 3+6grzałka / Heizelement / Heating element
 1 + 4 czujnik / Temperatur(e)sensor / Temperature sensor
 7 uziemienie / Schutzleitung / Grounding wire

SCHALTPLAN
SCHEMATIC

YELLOW CAP
SCHULZE

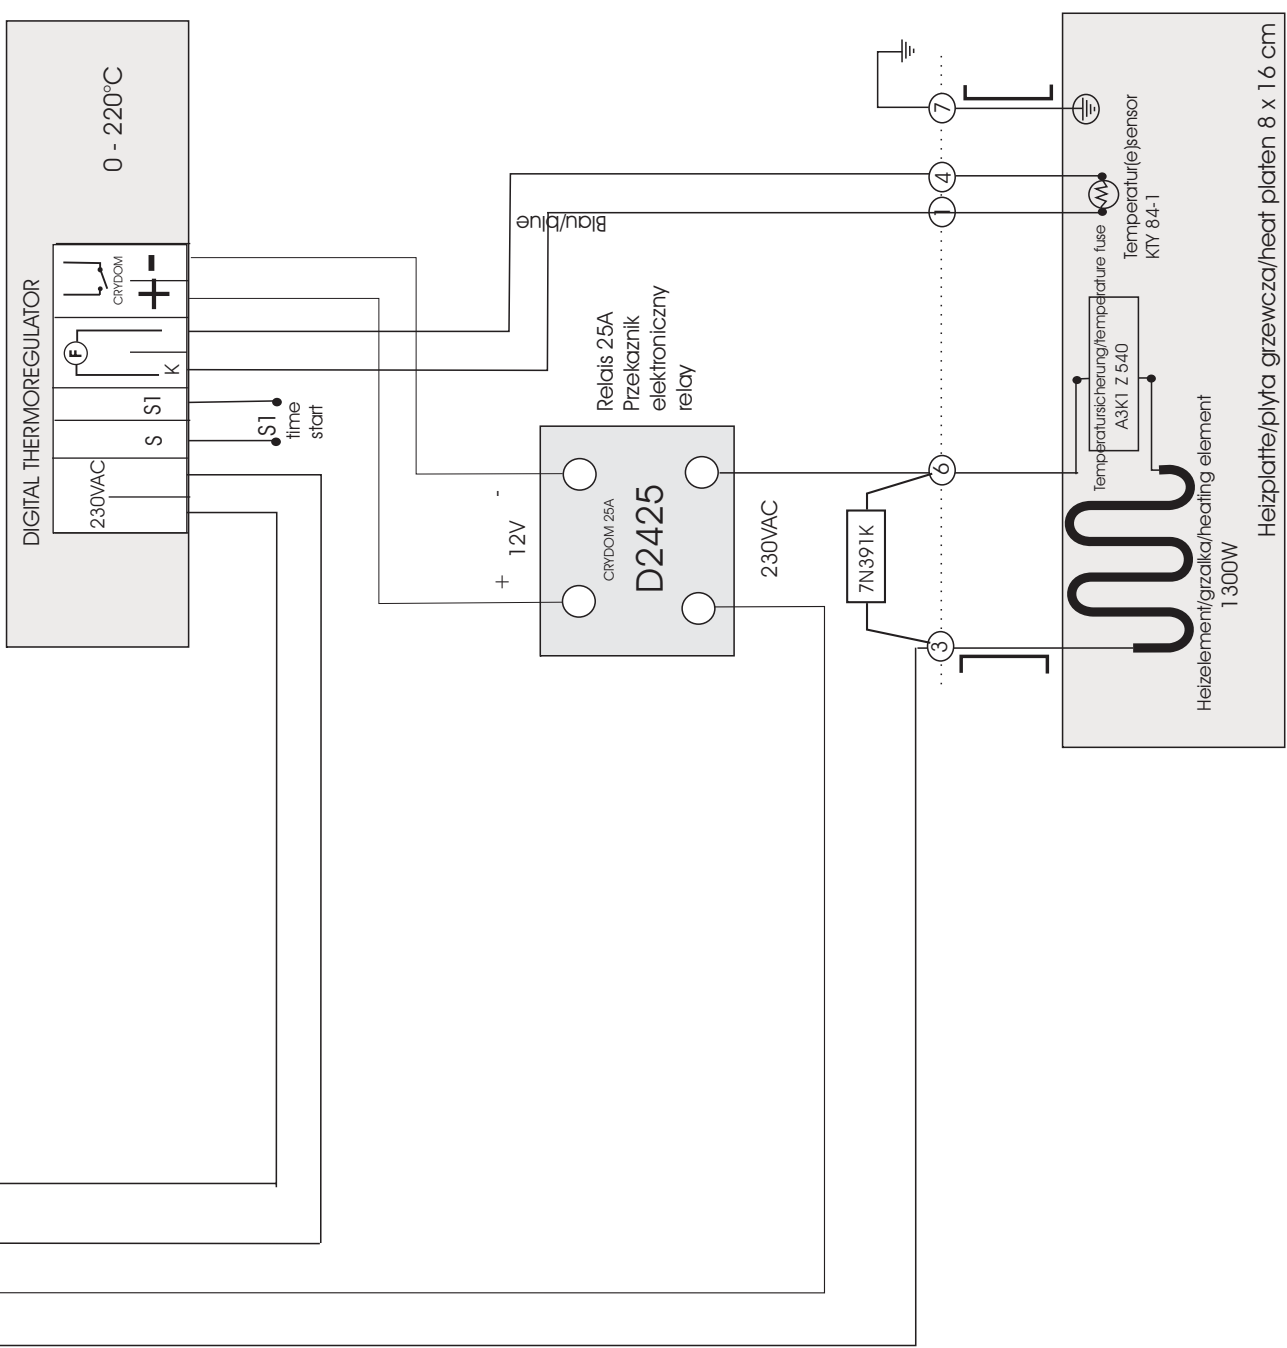

XXL	XXLs	<i>picollo</i> ^{plus}	AirPress	<i>Swing S</i>	<i>Swing</i>
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
digi-cap	YELLOW Mug-O-matic	YELLOW PRESS4050	YELLOW CAP	_____	
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	

- Base (varnish, greasing of shafts)
 - Heat and base platens, symmetry, silicone, teflon
 - Electrical connection, grounding wire, power cable
 - Electronics, max temperature 220° C, inspection of all functions
 - Hours of work at 180 °C
 - Temperature tolerance at 180°C - / +°C
 - Hours of work at 220°C
 - Test with transfer foil
 - Warning stickers
 - Packaging
- Serial number

EC declaration of conformity According to the EC directive 89/37 EC

The Walter Schulze GmbH
 Schmalenbachstr.15
 12057 Berlin

hereby declares as European agent for the manufacturer Romanik that the following described machine:

heat press. serial number

accords to the terms of the following EC directives:

- Machine directive (89/37)
- Low voltage directive (72/23)
- EMV-directive (89/336)

Used standards and technical specifications:

- EN 292-1, EN 292-2 "safety of machines"
- EN 60204-1 "electrical equipment of machines"

Berlin

 Peter Meidinger
 CEO