

craft express




brildor.com

craft express

AUTO HEAT PRESS

USER MANUAL

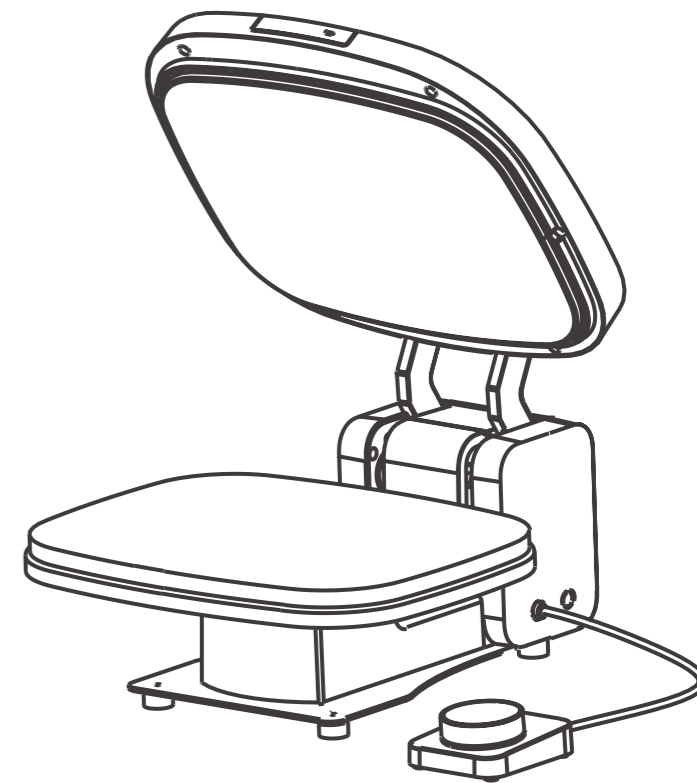

brildor.com


MACHINE FEATURES

Power	800W ±10%
Voltage	220V / 110V 50-60Hz
Temp. Range	40-210°C (104-410 °F)
Time Range	1-999 seconds

- 1 Open/Close Button
- 2 Heating Platen
- 3 Heat Press Mat
- 4 LED Display
- 5 Adjustment Knob
- 6 Power Cord Inlet




ADJUSTMENT KNOB FEATURES

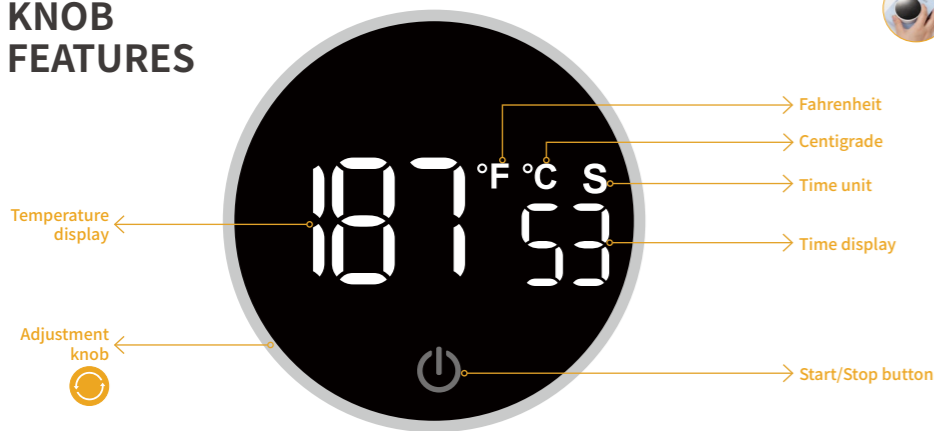


HOW TO USE THE ADJUSTMENT KNOB


How To Turn Your Press On And Off




1. Plug the power cord into the side of your press;



2. Press the power button to turn on the machine . The machine will open and begin heating up automatically;




3. To shut the press off , hold the power button for 3 seconds;




NOTE : The machine will switch off automatically after 2 hours of inactivity.


How To Switch Between Fahrenheit And Celcius




1. While the machine is off, press and hold the power button for 6 seconds;



2. Turn the Adjustment Knob to select Fahrenheit or Celsius;



3. Click the power button to save the setting.

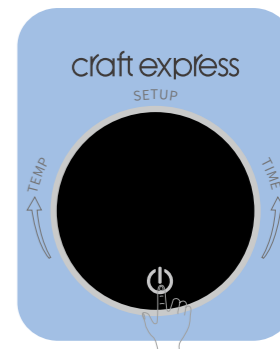

HOW TO USE THE ADJUSTMENT KNOB?


How To Set The Time




1. Turn the Adjustment Knob counterclockwise to the time setting mode. You will hear a beeping sound;



2. Turn the Adjustment Knob to the right to increase the time;



3. Turn the Adjustment Knob to the left to decrease the time;



4. Click the power button to save the settings.


How To Set The Temperature




1. Turn the Adjustment Knob clockwise to the temperature setting mode. You will hear a beeping sound;



2. Turn the Adjustment Knob to the right to raise the temperature;



3. Turn the Adjustment Knob to the left to lower the temperature;



4. Click the power button to save the settings.


HOW TO PRESS YOUR FIRST ITEM



1. Press the power button to automatically lift the top heating platen and heat your machine up;



2. Tape your design face down on your substrate using heat tape;

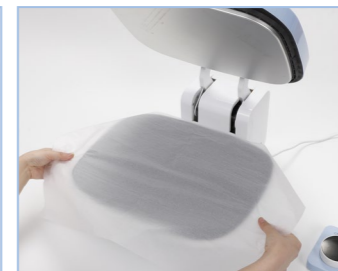

3. Cover your bottom platen with a sheet of protective paper;



4. Place the substrate in your heat press face up and cover it with a sheet of protective paper;




5. Use the Adjustment Knob to adjust your time and temperature settings;



6. Press the Open / Close button to automatically close your press and activate your timer;





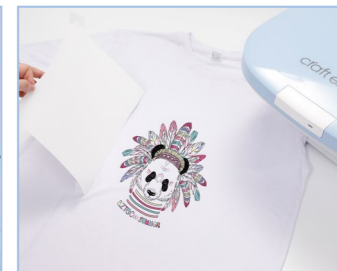




7. The machine will open automatically when the timer goes off;



8. Remove your transfer and reveal your finished product.

PRESSING GUIDELINES

Product							
Product Name	T-shirt	Pillow Cover	Photo Slate	MDF Plaque	Glass Cutting Board	Aluminum Ornaments	Leather Placemats
Temperature	385 °F	385 °F	400 °F	385 °F	370 °F	385 °F	356 °F
Time	45 sec	45 sec	300 sec	60 sec	300 sec	60 sec	50 sec

Note

All recommended press times & temperatures are for Craft Express products .

SAFETY INSTRUCTIONS

FAQS:

Why do my colors look light ?	The temperature is too low , the pressure is too light or the time is too short.
Why does my image look blurry ?	The image has been pressed for too long . Try a shorter time.
Why are some colors brighter than others ?	The pressure is uneven or the surface of the substrate is uneven.
Why does my paper stick to my substrate ?	The pressure is too heavy on your item.

Improper use may result in electric shock , fire , personal injury or other damage;

1. Do not use this machine in a hazardous location;
2. Do not use when the machine is not working properly;
3. Do not allow children or adults who do not understand this manual to operate this machine;
4. Do not disassemble or make repairs to this machine;
5. Do not use in unsuitable AC outlet;
6. Do not touch the heating platen when the machine is on;
7. Do not touch the heating platen when the machine is off and still hot.

