



UNLIMITED CREATION

APPLICATION INSTRUCTIONS

LaserFlex

LaserFlex has been specially designed to be cut and laser weeded (laser engraving).
Thus even the most complicated motifs become child's play !

FEATURES:



PU
water-
based



60µ



Cotton, polyester,
blended fabrics..
Less suitable for nylon
and other coated textiles.



60°C

LASER SETTINGS:



~60%



~65%



600 dpi

TRANSFER CONDITIONS:



165°C



17 s



medium/
high



Cold peel

Flex on Flex possible



1. Engrave/weed mirrored



2. Transfer design



3. Remove liner, done !

► PACKAGING



50 sheets

50 cm

25 m

A3

50 cm

10 m

A4

50 cm

5 m

The given conditions are an example for a 25W laser.
They can vary strongly depending on the device and
power of the device.


The engraving should be done from bottom to top and
with maximum possible extraction power, so that dust
is not drawn over the already lasered surface.

Weeding of heat transfer materials by a laser is under
the patent hold by SEF - EP 2 000 250-B1.

Store in a cool and dry place; protect against the influence of light when stored. We recommend not to exceed a storage period of 24 months. The technical specifications rest on extensive tests and technical research. Due to the variety of possible influences during refinement, and use, the specifications should be viewed as reference values. We recommend a suitability test on the original material. A legally binding warranty of specific characteristics cannot be derived from our specifications.




SEF • 110 BD DENIS-PAPIN 53000 LAVAL - FRANCE
TEL. +33 2. 43 53 36 48 FAX +33 2. 43 67 11 78
www.seftextile.com E-mail: contact@sef-france.com
SAS. CAPITAL € 945 000 RCS, LAVAL 304.802.291.00027

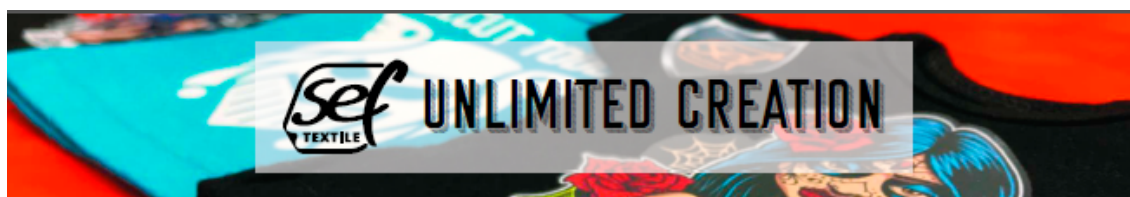



AVAILABLE COLORS

LaserFlex

	WHITE 01		SUNNY YELLOW 06 P 116 C		ORANGE 07 P 021 C		RED 10 P 1945 C
	PACIFIC BLUE 19 P 647 C		NAVY BLUE 22 P 289 C		GREEN 25 P 341 C		BLACK 02 P PROCESS BLACK C

Store in a cool and dry place; protect against the influence of light when stored. We recommend not to exceed a storage period of 24 months. The technical specifications rest on extensive tests and technical research. Due to the variety of possible influences during refinement, and use, the specifications should be viewed as reference values. We recommend a suitability test on the original material. A legally binding warranty of specific characteristics cannot be derived from our specifications.

SEF • 110 BD DENIS-PAPIN 53000 LAVAL – FRANCE
 TEL. +33 2. 43 53 36 48 FAX +33 2. 43 67 11 78
 www.seftextile.com E-mail: contact@sef-france.com
 SAS. CAPITAL € 945 000 RCS, LAVAL 304.802.291.00027



Modifié 05/2023