



UNLIMITED CREATION


APPLICATION INSTRUCTIONS

Transfilm/Transflock 0.5 Mono

Paper or polyester carriers flocced with 0.5mm viscose flock fibres for the production of monochrome flock transfers. They are characterized by a uniform, high flock density and a constant flock length. Designs can be transferred without unwanted flock fibres remaining on the textile surface.



1. Print adhesive on the flock surface




2. Apply hot-melt powder on the wet adhesive



3. Dry the adhesive at below 80 °C




4. Clean off excess hot-melt powder



5. Cure adhesive according to manufacturer's instructions



6. Separate motives




7. Transfer motif as specified by hot-melt manufacturer



8. Peel carrier when cold, done!

Detailed instruction video at: <https://youtu.be/90VjzUP7Vq0>

► PACKAGING

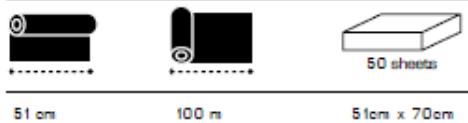

51 cm


100 m

51cm x 70cm

Store in a cool and dry place; protect against the influence of light when stored. We recommend not to exceed a storage period of 36 months. The technical specifications rest on extensive tests and technical research. Due to the variety of possible influences during refinement, and use, the specifications should be viewed as reference values. We recommend a suitability test on the original material. A legally binding warranty of specific characteristics cannot be derived from our specifications.

SEF • 110 BD DENIS-PAPIN 53000 LAVAL – FRANCE
TEL. +33 2.43 53 36 48 FAX +33 2.43 67 11 78
www.seftextile.com E-mail: contact@sef-france.com
SAS. CAPITAL € 945 000 RCS, LAVAL 304.802.291.00027



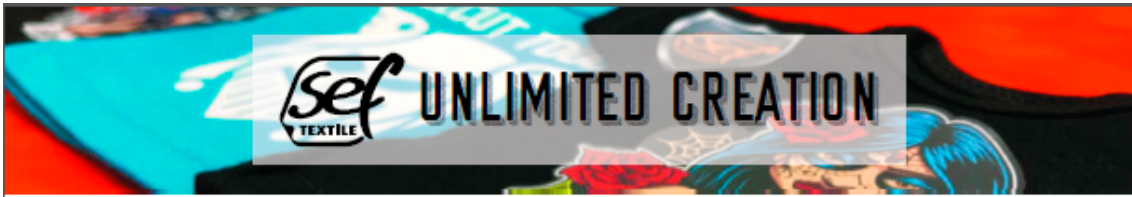

AVAILABLE COLORS

Transfilm/Transflock 0.5 Mono

	WHITE 01		LEMON 02 P 106 C		SUNNY YELLOW 03 P 137 C		ELECTRIC RED 04 P 196 C
	RED 05 P 200 C		BORDEAUX 17 P 7421 C		SKY BLUE 15 P 306 C		PACIFIC BLUE 08 P 287 C
	ROYAL BLUE 09 P 281 C		NAVY BLUE 07 P 289 C		GREEN 10 P 3415 C		COOL GREY 11 P COOL GRAY 9 C
	ANTHRACITE 19 P 432 C		BLACK 06 P HEXACHROME BLACK C				

White and black are delivered as Transflock on paper, the other colours as Transfilm on polyester.

Other colours on request.

Store in a cool and dry place; protect against the influence of light when stored. We recommend not to exceed a storage period of 36 months. The technical specifications rest on extensive tests and technical research. Due to the variety of possible influences during refinement, and use, the specifications should be viewed as reference values. We recommend a suitability test on the original material. A legally binding warranty of specific characteristics cannot be derived from our specifications.

SEF • 110 BD DENIS-PAPIN 53000 LAVAL – FRANCE
 TEL. +33 2.43 53 36 48 FAX +33 2.43 67 11 78
 www.seftextile.com E-mail: contact@sef-france.com
 SAS. CAPITAL € 945 000 RCS, LAVAL 304.802.291.00027



Modif. 07/2020