

INNOVATION TECH™ MANUAL PRO SERIES


USER MANUAL




Start Your Business From Here



Manual Pro One

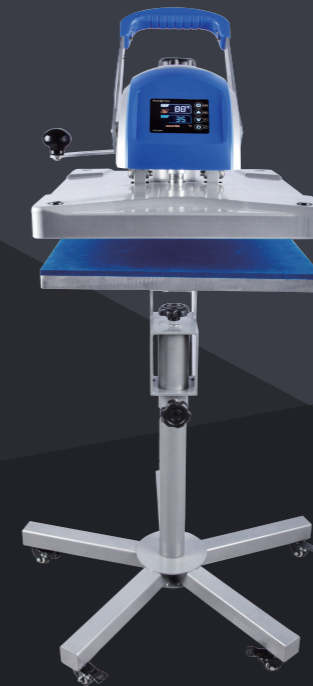

Manual Pro X

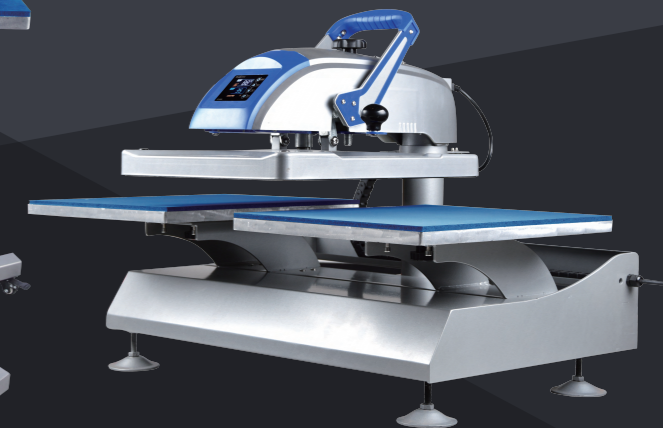

Manual Pro Two

NOTICE

1. Use the heat transfer press only as intended
2. Please keep children away from the machine
3. Make sure correct outlet before use the device
4. Burns can occur from contact with hot surface
5. Please grasp the handle firmly when machine is opening
6. Turn off the device when not in use and remove the power plug



CONTENT



- In the Box ----- 01/03/05
- Product Features ----- 02/04/06
- Display setting ----- 07/08
- Operation Instruction ----- 09/10
- Transfer Parameters ----- 11
- Troubleshooting ----- 12



In the box

1 x Manual Pro One 1 x Power Cable

1 x Silicon Mat 1 x User Manual

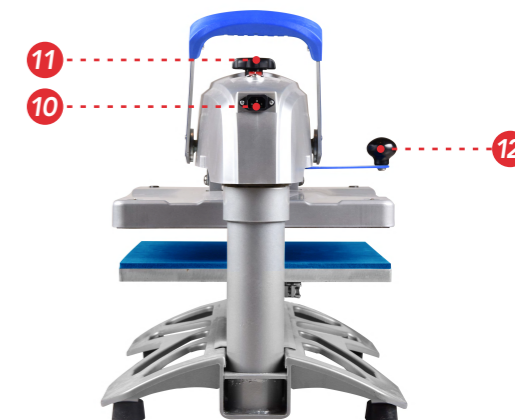

- | | | | |
|------------------------|---------------------|-----------------|-------------------|
| 1. Control Display | 4. Alu. Lower Plate | 7. Power Switch | 10. Power Outlet |
| 2. Heating Plate Cover | 5. Drawer Handle | 8. Foot Base | 11. Pressure Knob |
| 3. Silicone Mat | 6. Handle Bar | 9. Machine Base | 12. Swing Arm |



In the box


1 x Manual Pro One (Without Base)

1 x Movable Caddie

1 x Power Cable

1 x Silicon Mat

1 x User Manual



1. Control Display

2. Heating Plate Cover

3. Silicone Mat

4. Alu. Lower Plate

5. Height Adjust Knob

6. Brake Caster

7. Caddie Leg

8. Caddie Column

9. Rotation Knob


10. Handle Bar

11. Pressure Knob

12. Power Switch

13. Power Outlet

14. Swing Arm

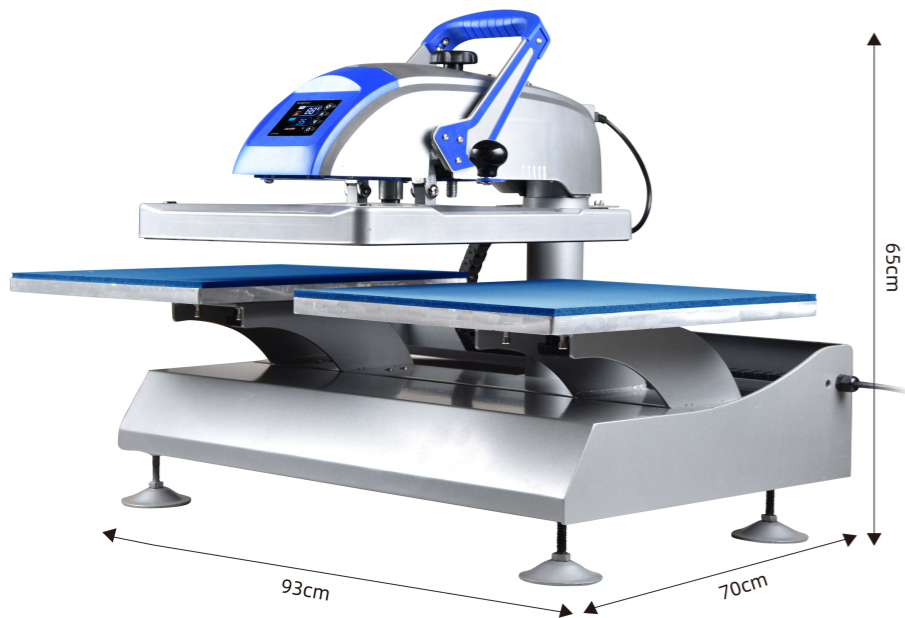


In the box

1 x Manual Pro Two


1 x Power Cable

2 x Silicon Mat

1 x User Manual



MACHINE INTRODUCTION

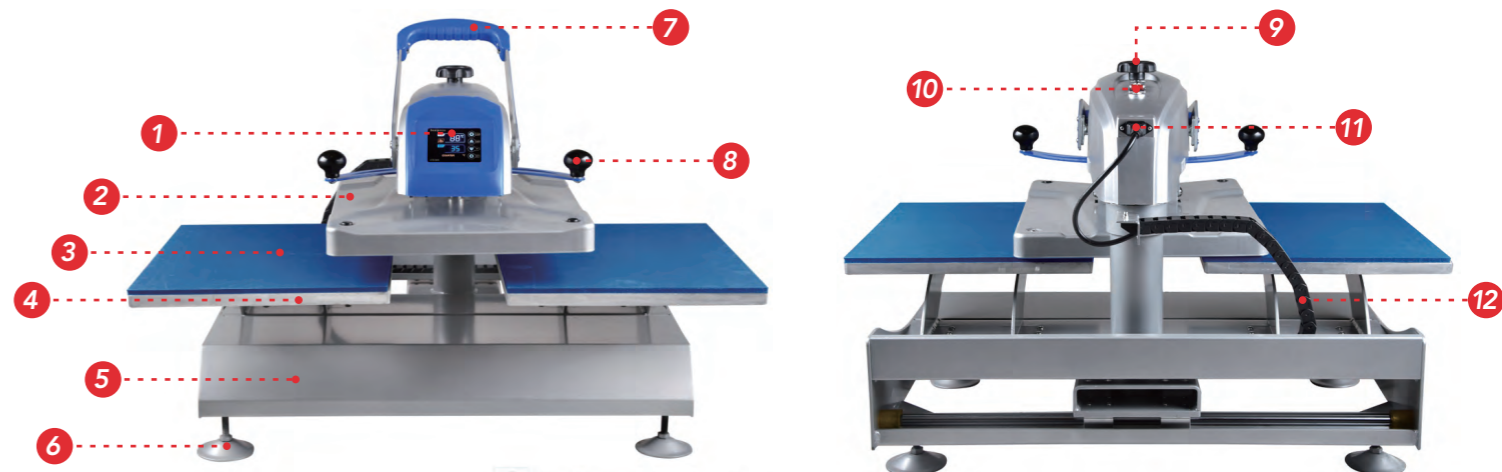

1. Control Display

2. Heating Plate Cover

3. Silicone Mat

4. Alu. Lower Plate

5. Machine Framework

6. Foot Base

7. Handle Bar

8. Swing Arm


9. Pressure Knob







10. Power Switch

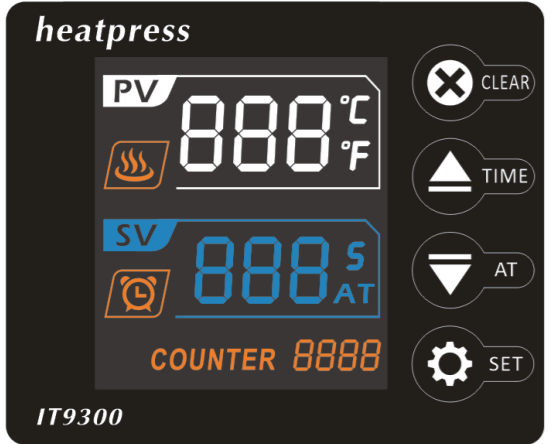11. Power Outlet

12. Tank Chain

CONTROLLER PROGRAM




PV : Present Value	SV : Set Value
°C : Celsius Read-out	°F : Fahrenheit Read-out
S : Timing in Seconds	888 : Temperature Digits
 : Heating Indicator	 : Timing
 : Plus Digits	 : Decrease Digits (Long hold for temperature calibration)
 : Set Mode	 : Counter Clearance (Long Hold)


CONTROL SETTING



Control Panel Display



P-3 : °C or °F Read-out
Touch SET & ↑↓ buttons to set °C or °F



Auto-off Introduction
It reads OFF and machine starts to cool down after machine raises to SET temp. and remains no operation for P-4 set time. Operation like control panel setting or heat pressing.



P-1 : Temp. Setting Mode
Touch SET & ↑↓ buttons to set desired Temp.



P-3 : °C or °F Read-out
Touch SET & ↑↓ buttons to set °C or °F



Wake Machine from Sleepy Mode
You can wake up the heat press from sleepy mode by touching any button on the control panel, and machine starts to heat again.



P-2 : Time Setting Mode
Touch SET & ↑↓ buttons to set desired time.





P-4 : Auto Power-off Mode
Touch SET & ↑↓ buttons to set auto-off time with 0-120 mins range





Clear Counter NO.
You can long hold the CLEAR button to clear the COUNTER NO. on the panel.


User Operation


A  Socket & connect to power outlet and power-on the heat press. (Tip: Press the tiny clip when you pull off the socket)


B  Set recommended TEMP, TIME settings on page 11.


C  Place the transfer item, you may adjust the pressure knob and try for a suitable pressure.


D  Wait for heat press heats up to the set temperature, the fire icon shows heating now.

E  Place the transfer items for preheat to make sure its plain surface, then place the transfer vinyl or paper and cover with a Teflon sheet.

F  Go on for heat transfer pressing and wait for timing counter down.

G  Take off the T-shirt and peel off the vinyl or paper depends on cold peel or hot peel.

H  Place the T-shirt with Teflon sheet and go on for heat pressing for another 5sec.

I  Oops, take off the T-shirt and finish transfer processing.




Regardless of the regular T-shirts or thin products, Innovation Tech™ Manual Pro Series are also recommended for fluffy items like 4cm thick while soft down-coats, sweaters, etc. While it's no so recommended for hard/solid & thick items like 2cm MDF boards or ceramic tiles, of course thinner product like 1cm is well supported.



Control panel P-4 is auto power-off setting with range 0-120min, 0 refers to not going enter into sleepy mode. As long as machine reaches to the set Temp. and is kept no in use for set time Say. 60mins, machine will enter into sleepy, display shows OFF and temperature cools down. You could touch any button on the control panel to wake up the machine.



After ten thousands of swing-away and press, maybe you need to adjust the position screw on the back column to make sure the upper heating platen and lower platen is always paralleled. (For Manual Pro One and X)



It's ordinary if you feel some drag force when you slide out or slide back the lower platen, as Magnetic Tech is applied, which makes sure lower platen won't slide back when you are threading a T-shirt, also makes sure upper & lower platens are in correct location after you slide the drawer back. (For Manual Pro One and X)



There are two knob on the moveable caddy, upper knob is for caddy height adjustment (Max. 10cm), the lower knob is for anti-rotation, you can move around the upper machine when lower knob is in loosen status. (for Manual Pro X only)

Transfer Material	Base Material	Printer	Device	Temperature	Time	Pressure	Remarks
Sublimation paper	Light color polyester fabric	Micro piezoelectric inkjet Epson & Ricoh printers with CISS & sublimation ink	Innovation Tech HeatPress	200 °C	25~35 s	Heavy	Mirror your design when printing on sublimation paper
	Light color cotton fabric						
	Non woven fabric bags						
Light color inkjet & laser transfer paper	Light color polyester fabric	Inkjet printer with pigment ink & inkjet paper. Laser printer with laser paper.	Innovation Tech™ Heat Press	185 °C	15~25 s	Medium	
	Light color cotton fabric						
	Non woven fabric bags						
Dark color inkjet & laser transfer paper	Dark color polyester fabric	Inkjet printer with pigment ink & inkjet paper. Laser printer with laser paper.	Innovation Tech™ Heat Press	165 °C	15 s	Medium	Teflon sheet is required
	Dark color cotton fabric						
	PU leather						
Heat transfer vinyl (HTV)	Polyester fabric	Cutting plotters		150~160°C	8~15 s	Medium	Check beforehand if your HTV requires hot or cold peel
	Cotton fabric						
	Knit fabrics				10~15 s		

Q: When pressed onto the garments, the color of the design is faded, or transfers are not fully stacked onto the garments.

A: Reason comes from three points, the pressure is not enough, the temperature is not hot enough or the design has not been pressed for enough time. You may need to try more to get right temp, time and pressure.

Q: The transfers are stacked on the heating platen.

A: Transfers like dark ink-jet transfer paper could be stacked on heating platen, you should use a Teflon sheet to cover the transfer paper. If this happens, please turn-off and cool machine completely before you try to peel the stacked paper, do not use sharp items like knives to scrape the heating platen as Teflon may be scratched.

Q: Hard to peel off the transfer paper or vinyl.

A: Please make sure transfers are warm peel or cold peel, so as to peel off accordingly.

Q: LCD control panel shows “000”.

A: That refers the thermocouple wire is disconnected, you shall turn to support team for help and replace the disconnected connection.

Q: How to get a reasonable pressure.

A: Adjust the pressure knob and try to lock down the handle, feel there is certain large resist force.

Q: Turn on the power, but the heat press does not work.

A: Please check the power plug connected well to the socket, you may turn to support team if problem is still remaining.

Any further help, please contact our support team.